


Selection table

Rotary servo motor specifications						Servo drive specifications			
Speed (rpm)	Voltage	Flange (mm)	Rated Torque	Capacity	Motor Model	Drive Model	W	D	H
3000	230 V	40x40	0.16 Nm	50 W	R88M-K05030(H/T)-(B)S2	R88D-KT01H	40	130	150
			0.32 Nm	100 W	R88M-K10030(H/T)-(B)S2	R88D-KT01H			
			0.64 Nm	200 W	R88M-K20030(H/T)-(B)S2	R88D-KT02H			
		60x60	1.3 Nm	400 W	R88M-K40030(H/T)-(B)S2	R88D-KT04H	55	170	150
			2.4 Nm	750 W	R88M-K75030(H/T)-(B)S2	R88D-KT08H			
			3.18 Nm	1 kW	R88M-K1K030(H/T)-(B)S2	R88D-KT15H			
	400 V	100x100	4.77 Nm	1.5 kW	R88M-K1K530(H/T)-(B)S2	R88D-KT15H	91	170	150
			2.39 Nm	750 W	R88M-K75030(F/C)-(B)S2	R88D-KT10F			
			3.18 Nm	1 kW	R88M-K1K030(F/C)-(B)S2	R88D-KT15F			
		120x120	4.77 Nm	1.5 kW	R88M-K1K530(F/C)-(B)S2	R88D-KT15F	94	193,5	198
			6.37 Nm	2 kW	R88M-K2K030(F/C)-(B)S2	R88D-KT20F			
			9.55 Nm	3 kW	R88M-K3K030(F/C)-(B)S2	R88D-KT30F			
130x130	12.7 Nm	4 kW	R88M-K4K030(F/C)-(B)S2	R88D-KT50F	130	212	250		
	15.9 Nm	5 kW	R88M-K5K030(F/C)-(B)S2	R88D-KT50F					
	4.77 Nm	1 kW	R88M-K1K020(H/T)-(B)S2	R88D-KT10H					
2000	230 V	130x130	7.16 Nm	1.5 kW	R88M-K1K520(H/T)-(B)S2	R88D-KT15H	85	170	150
			1.91 Nm	400 W	R88M-K40020(F/C)-(B)S2	R88D-KT06F			
			2.86 Nm	600 W	R88M-K60020(F/C)-(B)S2	R88D-KT06F			
	400 V	100x100	4.77 Nm	1 kW	R88M-K1K020(F/C)-(B)S2	R88D-KT10F	91	170	150
			7.16 Nm	1.5 kW	R88M-K1K520(F/C)-(B)S2	R88D-KT15F			
			9.55 Nm	2 kW	R88M-K2K020(F/C)-(B)S2	R88D-KT20F			
130x130	14.3 Nm	3 kW	R88M-K3K020(F/C)-(B)S2	R88D-KT30F	94	193,5	198		
	19.1 Nm	4 kW	R88M-K4K020(F/C)-(B)S2	R88D-KT50F					
	23.9 Nm	5 kW	R88M-K5K020(F/C)-(B)S2	R88D-KT50F					
1500	400 V	176x176	47.8 Nm	7.5 kW	R88M-K7K515C-(B)S2	R88D-KT75F	233	334	250
		220x220	70.0 Nm	11 kW	R88M-K11K015C-(B)S2	R88D-KT150F	261	270	450
1000	230 V	130x130	95.5 Nm	15 kW	R88M-K15K015C-(B)S2	R88D-KT150F	85	170	150
			8.59 Nm	900 W	R88M-K90010(H/T)-(B)S2	R88D-KT15H			
			8.59 Nm	900 W	R88M-K90010(F/C)-(B)S2	R88D-KT15F			
	400 V	130x130	19.1 Nm	2 kW	R88M-K2K010(F/C)-(B)S2	R88D-KT30F	130	212	250
			28.7 Nm	3 kW	R88M-K3K010(F/C)-(B)S2	R88D-KT50F			
			43.0 Nm	4.5 kW	R88M-K4K510C-(B)S2	R88D-KT50F			
57.3 Nm	6 kW	R88M-K6K010C-(B)S2	R88D-KT75F	233	334	250			


Flange dimensions



Motor model type designation detail

H= 230 V and Incremental Encoder
T= 230 V and Absolute Encoder
F= 400 V and Incremental Encoder
C= 400 V and Absolute Encoder
B= Motor with Brake (Blank=No brake)

Drive dimensions



Software

Description	Model
Software tool with Drive Programming functionality (CX-Drive version 2.10 or higher)	CX-Drive

Note: Drive Programming is available in the Accurax G5 Analogue/ Pulse model with firmware 1.10 or higher.

OMRON EUROPE B.V. Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.industrial.omron.eu

Austria
Tel: +43 (0) 2236 377 800
www.industrial.omron.at

France
Tel: +33 (0) 1 56 63 70 00
www.industrial.omron.fr

Norway
Tel: +47 (0) 22 65 75 00
www.industrial.omron.no

Spain
Tel: +34 913 777 900
www.industrial.omron.es

Belgium
Tel: +32 (0) 2 466 24 80
www.industrial.omron.be

Germany
Tel: +49 (0) 2173 680 00
www.industrial.omron.de

Poland
Tel: +48 (0) 22 645 78 60
www.industrial.omron.pl

Sweden
Tel: +46 (0) 8 632 35 00
www.industrial.omron.se

Czech Republic
Tel: +420 234 602 602
www.industrial.omron.cz

Hungary
Tel: +36 1 399 30 50
www.industrial.omron.hu

Portugal
Tel: +351 21 942 94 00
www.industrial.omron.pt

Switzerland
Tel: +41 (0) 41 748 13 13
www.industrial.omron.ch

Denmark
Tel: +45 43 44 00 11
www.industrial.omron.dk

Italy
Tel: +39 02 326 81
www.industrial.omron.it

Russia
Tel: +7 495 648 94 50
www.industrial.omron.ru

Turkey
Tel: +90 212 467 30 00
www.industrial.omron.com.tr

Finland
Tel: +358 (0) 207 464 200
www.industrial.omron.fi

Netherlands
Tel: +31 (0) 23 568 11 00
www.industrial.omron.nl

South Africa
Tel: +27 (0)11 608 3041
www.industrial.omron.co.za

United Kingdom
Tel: +44 (0) 870 752 08 61
www.industrial.omron.co.uk

More Omron representatives
www.industrial.omron.eu

Although we strive for perfection, Omron Europe BV and/or its subsidiary and affiliated companies do not warrant or make any representations regarding the correctness or completeness of the information described in this document. We reserve the right to make any changes at any time without prior notice.

ACCURAX G5 SERVO DRIVE

Expanded with Programming Functionality



accurax

» Safety and full closed loop built-in

» Integrated positioner as standard

» For stand-alone applications

realizing

Accurax G5

Built-in positioning with indexer functionality

The Accurax G5 Analogue/Pulse series is supplied with an integrated positioner as standard. The positioner programmability is provided to the user via a Drive Programming environment, and it is ideal for simple positioning solutions like assembly machines, sorting and pick and place applications. The Drive Programming editor is included in the CX-Drive tool.

Full closed loop

- Built-in external encoder input for high accuracy
- The external encoder can be selected between phase AB output and incremental or absolute encoder with serial communication

Programming I/O

- 10 general purpose input signals: up to 5 digital inputs to select the individual commands or sequences, strobe function, run, etc
- 4 general purpose output signals - 1 output signal fixed to alarm output

Accurax G5 servo system

- Wide range of motors from 50 W up to 15 kW
- High-response frequency of 2 kHz
- Load vibration suppression
- Embedded Safety conforming ISO13849-1 Performance Level d
- Advanced tuning algorithms (Anti-vibration function, torque feedforward, disturbance observer)
- Drives available for multi axes applications with EtherCAT built-in




Safety conformance

- PL-d according ISO13849-1
- STO: IEC61800-5-2
- SIL2 according to EN61508




Programming functionality

- Point-to-point positioning functions
- Position and speed control modes. Torque limit function
- Up to 32 indexing points
- Same positioning performance as with the analogue/pulse input command

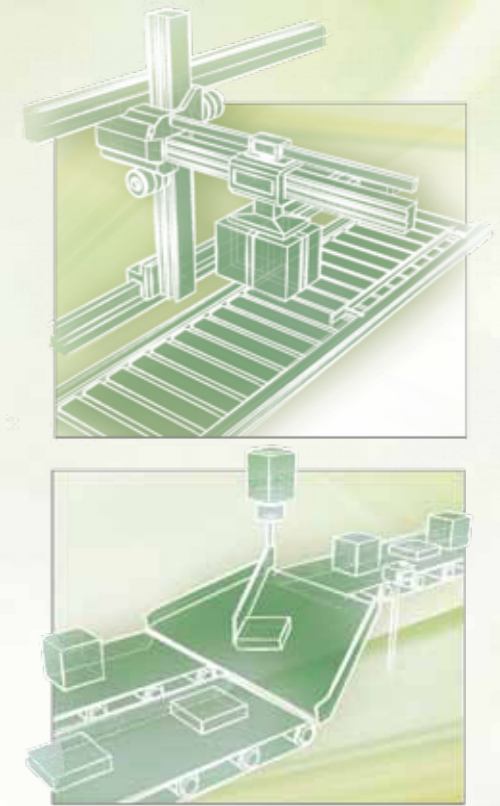


GRAPHICAL PROGRAMMING

Control Commands

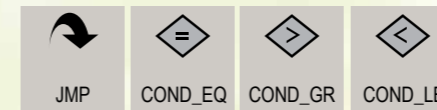

Motion Commands

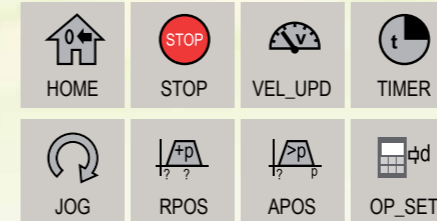

- Set of graphical functions for intuitive programming
- Flow Chart programming language
- Conditional functions for I/O signals, command/current position, position error pulse, command/motor velocity, command torque
- Velocity update on the fly
- Standard USB programming port

