

**OMRON**

# Artificial Intelligence Machine Automation Controller

NX701-Z□00 / NY5□2-Z□00



Ultimate innovation  
goes beyond impossible



Manufacturing learns and evolves  
at intelligent manufacturing sites




# AI and IoT help people and machines grow together at future factories

While manufacturing are rapidly becoming more advanced, the world faces a shrinking labor force and shortage of skilled engineers. Omron will realize a factory of the future where people and machines grow together by leveraging AI and IoT technologies at the machine level and converting tacit knowledge, such as intuition and experience of experts, into explicit knowledge.


Omron is aiming for a future factory realized by our system using AI controller

Non-stop equipment      Equipment maximizing performance      Zero defect equipment

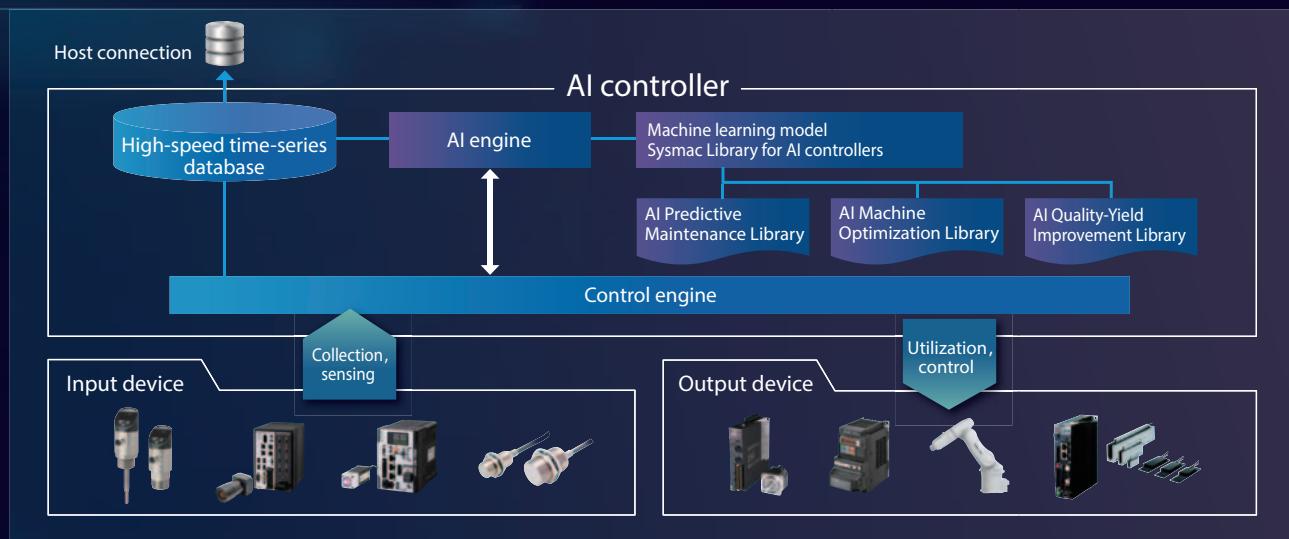

## Ultimate AI edge controller born from the fusion of AI and control

The artificial intelligence machine automation controller (AI controller) integrates unique AI functionality into control, allowing you to leverage information at the machine level in real time. The AI controller can very quickly and accurately detect momentary irregularity of equipment and feed back to control in real time. As well as enabling trend monitoring at the machine level, this also prevents quality defects that occur on high-speed production lines within a very short time.

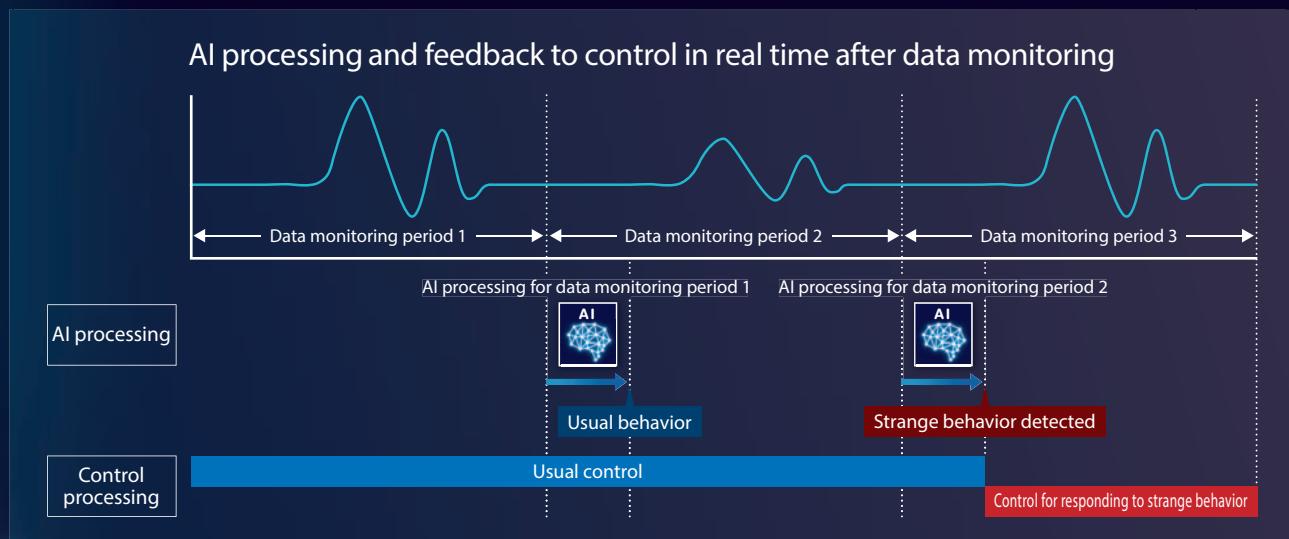

In addition, significant patterns which data scientists usually discover by mining data are provided as software functional components : Sysmac Library for AI controllers. The AI Predictive Maintenance Library to realize non-stop equipment is now available, and other libraries to realize equipment maximizing performance and zero defect equipment will also be available soon.

# Predictive maintenance powered by AI realizes non-


## Innovative status-based maintenance

Strange behavior is monitored using machine data in real time, which allows you to carry out maintenance based on machine status when it is really necessary.

**From :**  
Reactive or regular maintenance

### Reactive or regular maintenance by experts


Skilled engineers perform maintenance based on their intuition and experience regularly or after failure has occurred (time-based maintenance).

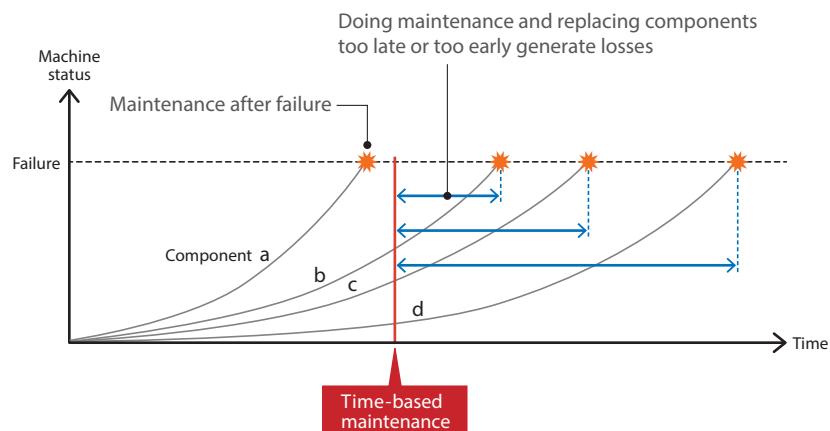

**To :**  
Predictive maintenance

### Predictive maintenance using AI controller

AI monitors machine status using machine data. Predictive maintenance is performed based on machine status when it is necessary (status-based maintenance).

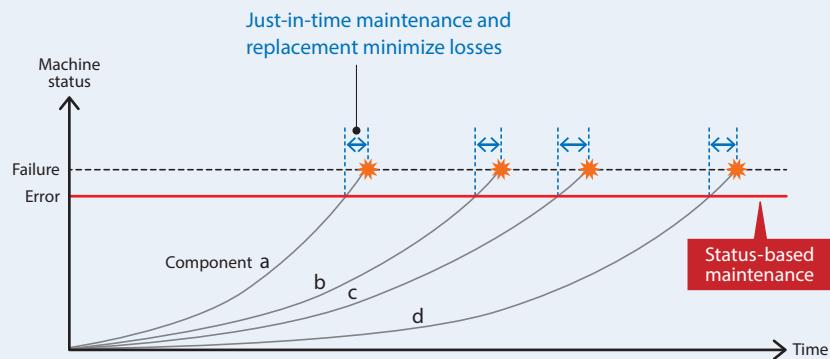

### Benefits expected from predictive maintenance

1. Minimized downtime reduces production losses
2. Just-in-time maintenance reduces costs
3. Replacing components when necessary reduces stock of components
4. Error locations can be identified without analysis
5. Maintenance work can be standardized without special knowledge and skills


# stop equipment

## Predictive maintenance procedure using AI

### Generating a learning model

**Step 1**


A learning model including a threshold value is generated from current machine data.  
(Usual behavior is learned.)

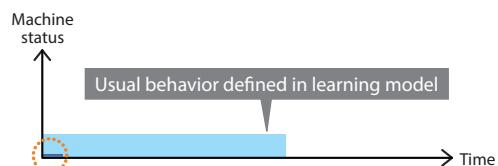

### Monitoring the machine

**Step 2**


The machine is monitored based on the learning model.  
If the machine status exceeds the threshold value, a notification is issued.

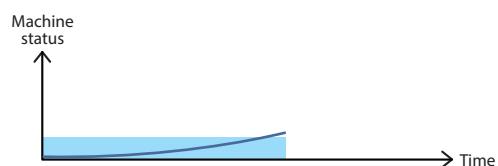

### Setting a new threshold value

**Step 3**


The machine status is checked.  
If no error is found,  
a new threshold value is set.

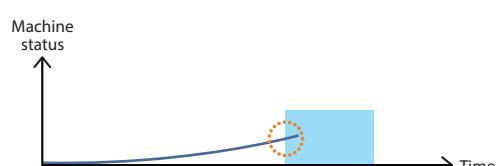

### Replacing components

**Step 4**


An error occurs while threshold value setting and monitoring are repeated.  
Components are replaced.

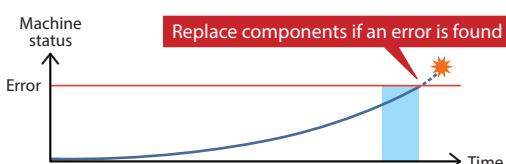

### Generating a learning model with new components

**Step 5**


A new learning model including the threshold value is generated based on the previous error level after components are replaced. Repeating these steps makes status-based maintenance more reliable.

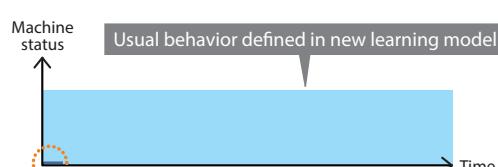

# AI controller detects irregularity quickly and accurately

The unique data utilization functionality to provide ultimate edge control makes previously invisible machine status visible, which enables the AI controller to detect strange behavior of machines at the microsecond level.


## Comparison of detection capabilities between AI and conventional method (time-series data such as voltage and current)

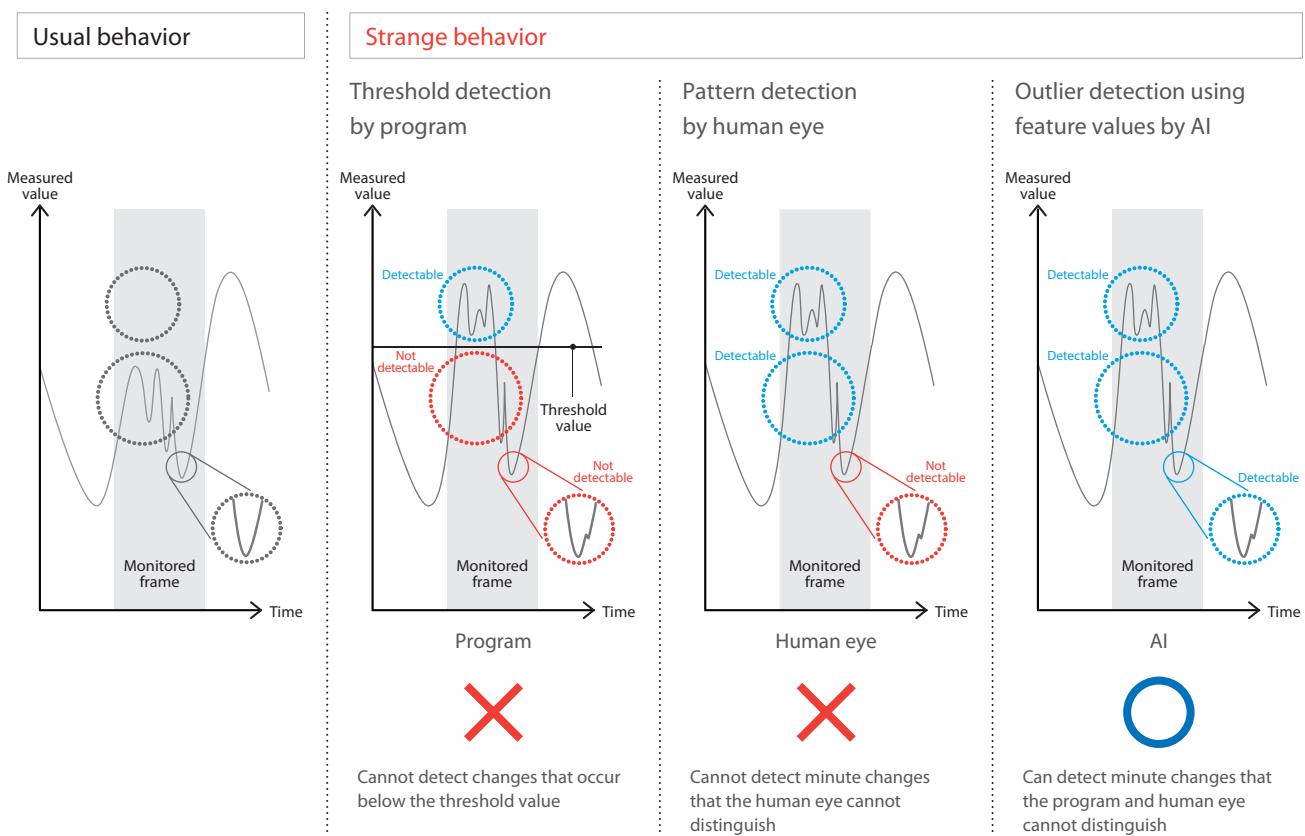

## Functions to detect quickly and accurately

### High-speed Time Series Database Function

Collection and storage of time-series data are fully synchronized with the control cycle. The periodically sampled data is used to understand machine behavior, enabling creation of accurate learning models and judgment. Moreover, the host connection functionality allows the linkage of AI between the host and machine levels, which helps optimize the introduction of IoT to factories.

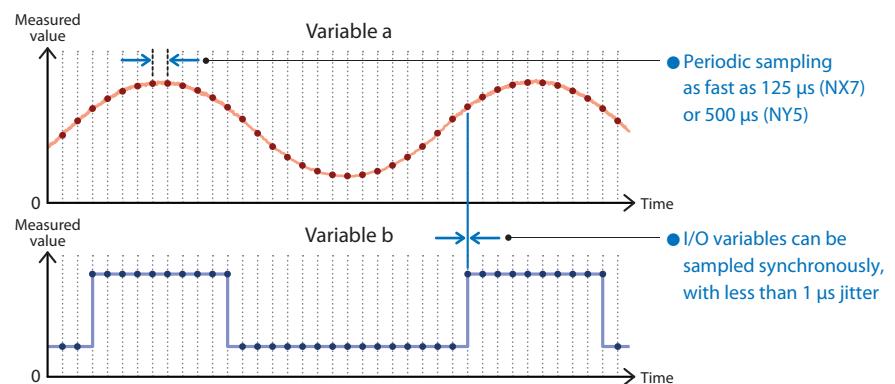


## Data utilization to detect strange behavior

### Data collection

Time-series data collection, feature value creation


Feature values are generated from data that is gathered when machine behavior is usual and strange.

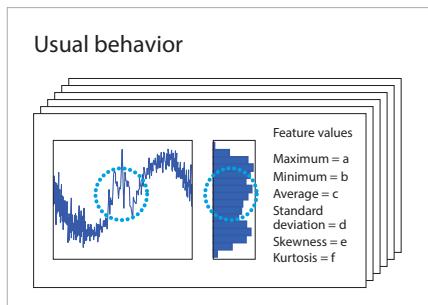

### Data analysis

Mining, machine learning


Feature values which are used to judge behavior to be strange are selected. A machine learning model is generated from the analysis result.

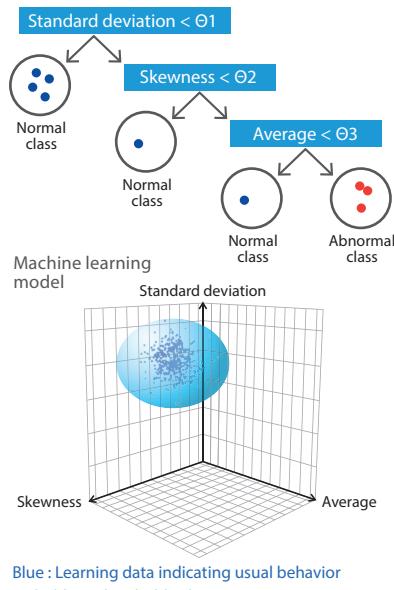

### Data utilization


Real-time monitoring by AI

The machine learning model is transferred to the AI controller. Machine status is monitored in real time.

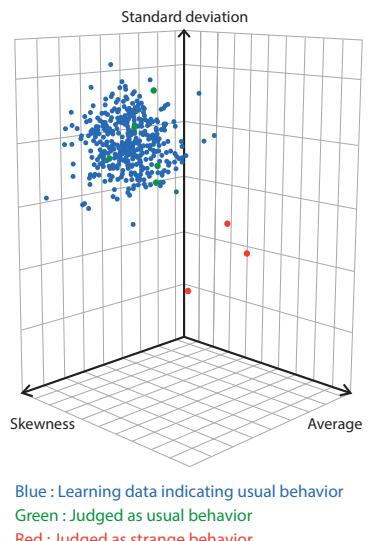

## Ultra-high-speed AI engine


The AI engine provides both speed and accuracy—Omron has developed an AI engine based on the machine learning engine Isolation Forest that is ideal for real-time processing and tuned it to increase detection accuracy. The algorithm applicable to multimodal data can be used for high-mix production lines where two or more operating modes are required.

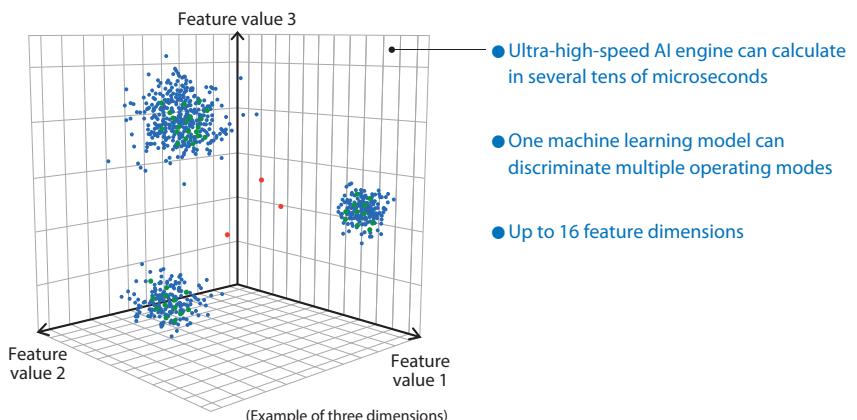

# AI Predictive Maintenance Library enables non-stop

## Software components for accurate detection of strange behavior

The AI Predictive Maintenance Library, a collection of software components, calculates optimal future values to judge behavior from data of operating mechanisms. You can now start to do predictive maintenance.

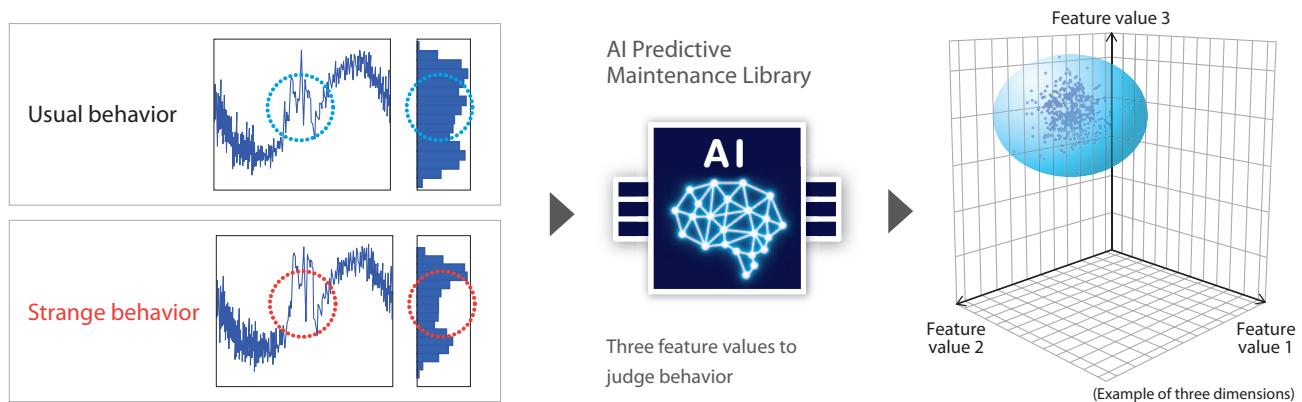


Note. Omron engineers set learning data and threshold values optimized for your machine. Consult your Omron sales representative for details.

## Robustness minimizes effects of environmental changes

Time elapses and ambient temperature changes throughout the day and year after the machine is started.

Omron has developed its own feature values that minimize the effects of environmental changes, helping you stabilize your predictive maintenance activities.

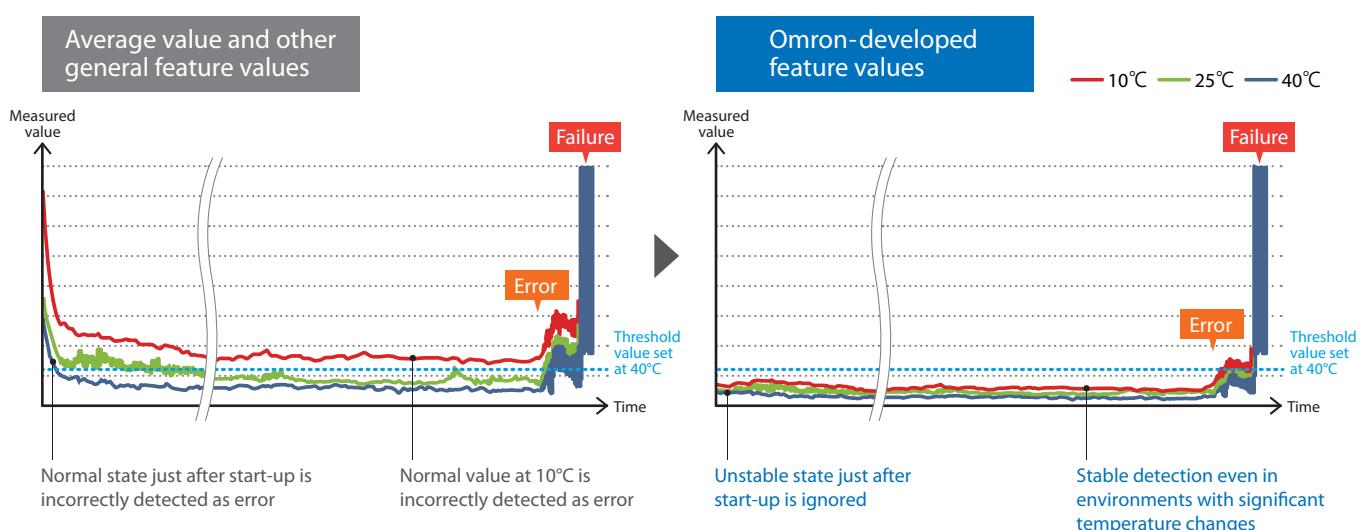

※The above results were obtained under Omron's test conditions. The same results are not guaranteed for all conditions.


# equipment

## System configuration

Omron helps you perform predictive maintenance using AI.


### AI Controller Software

Configuration tool

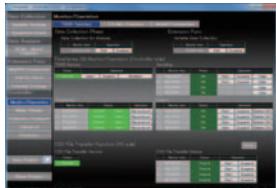


AI Operator

Visualization tool

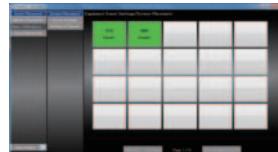

AI Viewer

Install a web server if you want to transfer calculation results to it

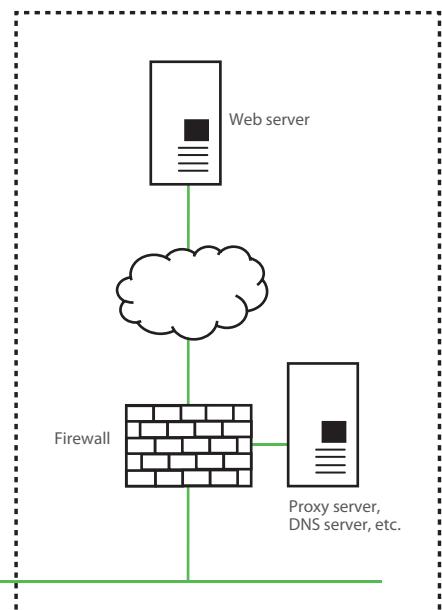

NA Programmable Terminal



[ NX Series ]


Install the AI controller software in the host computer  
• AI Operator • AI Viewer



EtherNet/IP®

[ NY Series ]

Install the AI controller software in Windows on the NY Series  
• AI Operator  
• AI Viewer

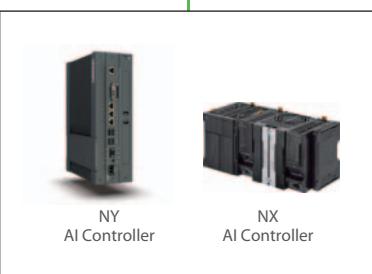

AI controller


- Time Series Database Function
- Feature Value/Machine Learning Function
- WebAPI Connection Function

AI Predictive Maintenance Library



EtherCAT®

EtherCAT slaves

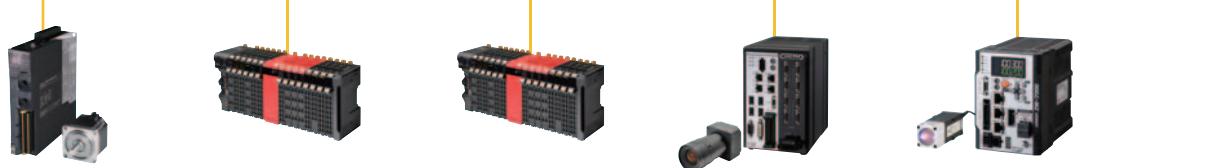

## Ordering Information

### NX-series AI Controller

Product Name	Specifications			Current (Power consumption)	Model
	Program capacity	Memory capacity for variables	Number of motion axes		
NX701 CPU Units with AI function	80MB	4 MB : Retained during power interruption	256	40W (including SD Memory Card and End Cover)	NX701-Z700
		256 MB : Not retained during power interruption	128		NX701-Z600

### NY-series AI Controller

Product Name	Specifications						Model
	Operating system	CPU type	Number of motion axes	RAM memory (non-ECC type)	Storage size	Interface option	
Industrial Box PC with AI function	Windows Embedded Standard 7-64bit	Intel®Core™ i7-4700EQ	64	16GB	128GBx2 SSD iMLC/pSLC	RS-232C	NY512-Z500-1XX214T1X
			32				NY512-Z400-1XX214T1X
			16				NY512-Z300-1XX214T1X
			64	16GB	128GBx2 SSD iMLC/pSLC	DVI-D	NY512-Z500-1XX214T2X
			32				NY512-Z400-1XX214T2X
			16				NY512-Z300-1XX214T2X
Industrial Panel PC with AI function	Windows Embedded Standard 7-64bit	Intel®Core™ i7-4700EQ	64	16GB	128GBx2 SSD iMLC/pSLC	RS-232C	NY532-Z500-112214T10
			32				NY532-Z400-112214T10
			16				NY532-Z300-112214T10
			64	16GB	128GBx2 SSD iMLC/pSLC	DVI-D	NY532-Z500-112214T20
			32				NY532-Z400-112214T20
			16				NY532-Z300-112214T20

For details, refer to the data sheet of the AI Machine Automation Controller NX/NY-Series.

## AI Controller Software

Please purchase a DVD and required number of licenses the first time you purchase the Sysmac Studio. DVDs and licenses are available individually. Each model of licenses does not include any DVD.

Product Name	Number of licenses	Model
AI Controller Standard Software*	— ( Media only : DVD )	SYSMAC-AICSTE00D
	1 license	SYSMAC-AICSTE01L
	10 licenses	SYSMAC-AICSTE10L
	30 licenses	SYSMAC-AICSTE30L
	50 licenses	SYSMAC-AICSTE50L

\* The AI Controller Standard Software and one license are bundled with the NY AI Controller.

### ● Support Software

Software Name	Specification
AI Operator	The AI Operator is a tool to configure AI function settings of the AI Controller as well as to monitor the status. It works on Windows. The AI Operator also provides a function for transferring results of calculation performed by the Feature Value/Machine Learning Function from the AI Controller to a computer.
AI Viewer	The AI Viewer is a tool to visualize feature values and results of equipment events that are output by the Feature Value/Machine Learning Function. It works on Windows. The AI Operator reads out data transferred from the AI Controller and displays it on a computer for the users to view.

## Sysmac Library for AI Controller

Download Sysmac Library for AI Controller to your PC using AI Operator. Install the library before you use it.

Target Mechanism	Software model	Specification
AI Predictive Maintenance Library (Cylinder)	SYSMAC-ZPA001000W	CylinderStatus generates mechanism state variables that reflect the status of the cylinder referenced by the feature value / machine learning functions.
AI Predictive Maintenance Library (Ball Screw)	SYSMAC-ZPA002000W	BallScrewStatus generates mechanism state variables that reflect the status of the ball screw referenced by the feature value / machine learning functions.
AI Predictive Maintenance Library (Belt & Pulley)	SYSMAC-ZPA003000W	BeltPulleyStatus generates mechanism state variables that reflect the status of the belt & pulley referenced by the feature value / machine learning functions.

Target Mechanism	Number of licenses*	Model
AI Predictive Maintenance Library (Cylinder)	5 licenses	SYSMAC-ZPA001005L
	10 licenses	SYSMAC-ZPA001010L
	50 licenses	SYSMAC-ZPA001050L
AI Predictive Maintenance Library (Ball Screw)	5 licenses	SYSMAC-ZPA002005L
	10 licenses	SYSMAC-ZPA002010L
	50 licenses	SYSMAC-ZPA002050L
AI Predictive Maintenance Library (Belt & Pulley)	5 licenses	SYSMAC-ZPA003005L
	10 licenses	SYSMAC-ZPA003010L
	50 licenses	SYSMAC-ZPA003050L

\* One license is required for each mechanism to monitor.

Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany. EtherNet/IP™, CIP Safety™, and DeviceNet™ are trademarks of ODVA. Intel, Celeron, and Intel Core are trademarks of Intel Corporation in the U.S. and/or other countries. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>) Other company names and product names in this document are the trademarks or registered trademarks of their respective companies. The product photographs and figures that are used in this catalog may vary somewhat from the actual products.

**OMRON Corporation      Industrial Automation Company**  
Kyoto, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

**Regional Headquarters**

**OMRON EUROPE B.V.**  
Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands  
Tel: (31)2356-81-300/Fax: (31)2356-81-388

**OMRON ASIA PACIFIC PTE. LTD.**  
No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

**OMRON ELECTRONICS LLC**  
2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

**Authorized Distributor:**

© OMRON Corporation 2018 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

Cat. No. P137-E1-01

1018(1018)